

30V_{DS}/±20V_{GS} N-Channel MOSFET

General Description

These N-Channel enhancement mode power field effect transistors are using SGT technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode.

Features



BVDSS	30V
R_{DS(ON)}(10V)	3.8mΩ (TYP)
R_{DS(ON)}(4.5V)	5.8mΩ (TYP)
I_D	60A

100% UIS TESTED!

100% ΔV_{ds} TESTED!



PDFN3030

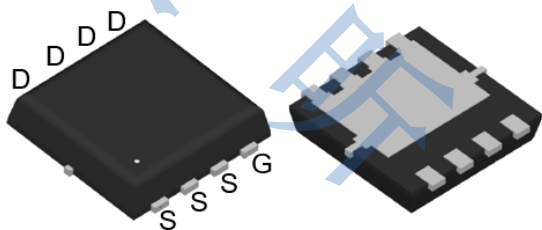

Absolute maximum ratings (T_A=25°C)

Symbol	Parameter	Value	Unit
V _{DS}	Drain-Source Voltage	30	V
V _{GS}	Gate-Source Voltage	±20	V
I _D	Continuous Drain Current (T _C =25°C)	60	A
	Continuous Drain Current (T _C =100°C)	38	A
I _{DM}	Pulsed Drain Current	150	A
I _{AS}	Avalanche Current (L=0.1mH)	27	A
E _{AS}	Single Pulsed Avalanche Energy	36	mJ
P _D	Maximum Power Dissipation (T _C =25°C)	28	W
	Maximum Power Dissipation (T _C =100°C)	11.3	W
T _J , T _{STG}	Operating, Storage Temperature Range	-55~150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R _{θJC}	Thermal Resistance, Junction-to-Case	4.4	---	°C/W
R _{θJA}	Thermal Resistance, Junction-to-Ambient	61	---	°C/W

Electrical Characteristics ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

Static State Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
B_{VDSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	30	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=30V, V_{GS}=0V$	---	---	1	μA
I_{GSS}	Gate -Source Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	---	---	± 100	nA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	1.2	1.6	2.0	V
$R_{DS(ON)}$	Drain-Source On-stage Resistance	$V_{GS}=10V, I_D=10A$	---	3.8	5	m Ω
		$V_{GS}=4.5V, I_D=8A$	---	5.8	7.5	

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	$V_{DS}=15V$ $V_{GS}=0V$ $f=1MHz$	---	834	---	pF
C_{oss}	Output capacitance		---	210	---	
C_{riss}	Reverse transfer capacitance		---	20	---	
R_g	Gate Resistance	$f=1MHz$	---	3.6	---	Ω
Q_g	Total Gate Charge	$V_{DS}=15V$ $V_{GS}=10V$ $I_D=10A$	---	13	---	nC
Q_{gs}	Gate Source Charge		---	2.6	---	
Q_{gd}	Gate Drain Charge		---	1.8	---	
$t_{d(on)}$	Turn-on delay Time	$V_{DS}=15V$ $V_{GS}=10V$ $R_G=3\Omega$ $I_D=10A$	---	5.3	---	ns
t_r	Rise time		---	3.6	---	
$t_{d(off)}$	Turn-off delay Time		---	16.8	---	
t_f	Fall time		---	4.2	---	
V_{SD}	Diode Forward Voltage	$V_{GS}=0V, I_{SD}=10A$	---	0.9	1.2	V
t_{rr}	Reverse Recovery Time	$I_D=10A$ $d_i/d_t=100A/\mu s$	---	11.5	---	ns
Q_{rr}	Reverse Recovery Charge		---	15.6	---	nC

Note:

1.Repetitive Rating : Pulsed width limited by maximum junction temperature.

2. $V_{DD}=15V, V_{GS}=10V, L=0.1mH, I_{AS}=27A$, Starting $T_J=25^{\circ}\text{C}$

3.The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

4.Essentially independent of operating temperature.

Electrical Characteristics Diagrams

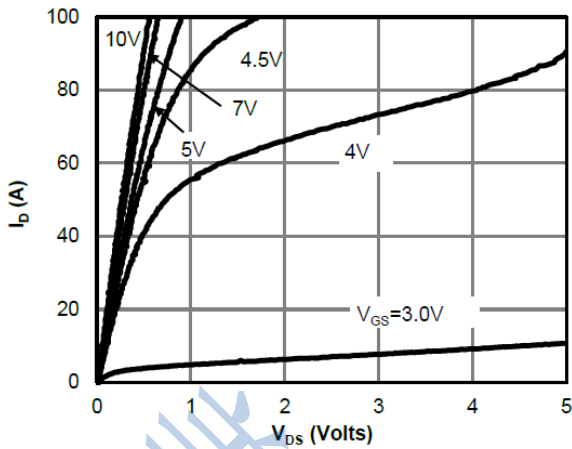


Figure 1. On-Region Characteristics

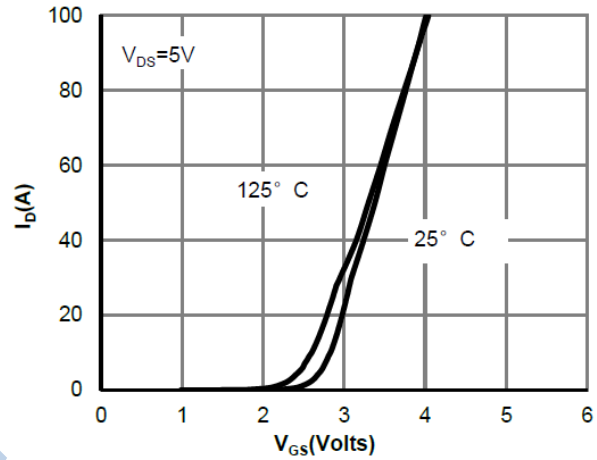


Figure 2. Transfer Characteristics

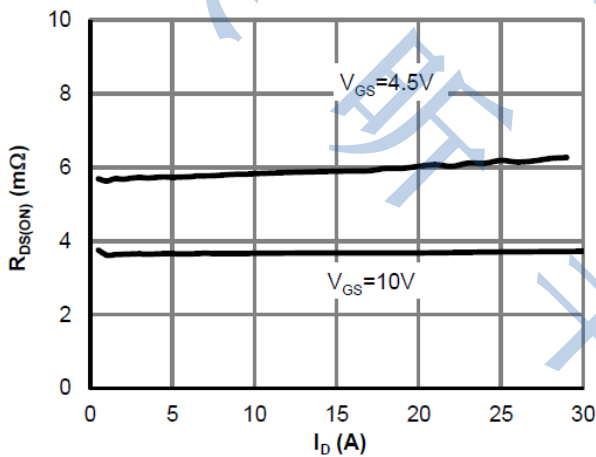


Figure 3. $R_{DS(on)}$ vs. I_D and Gate Voltage

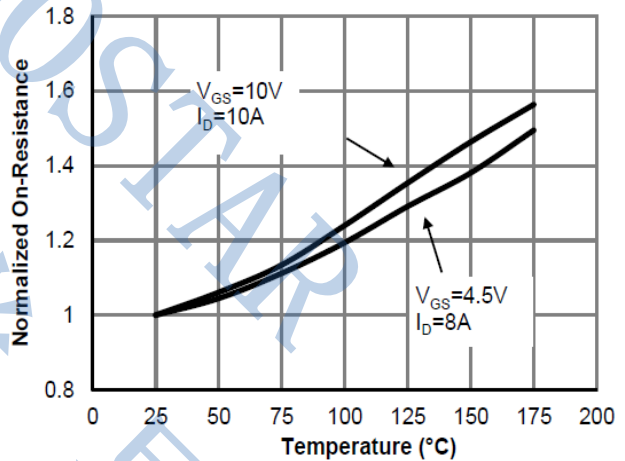


Figure 4. $R_{DS(on)}$ vs. Junction Temperature

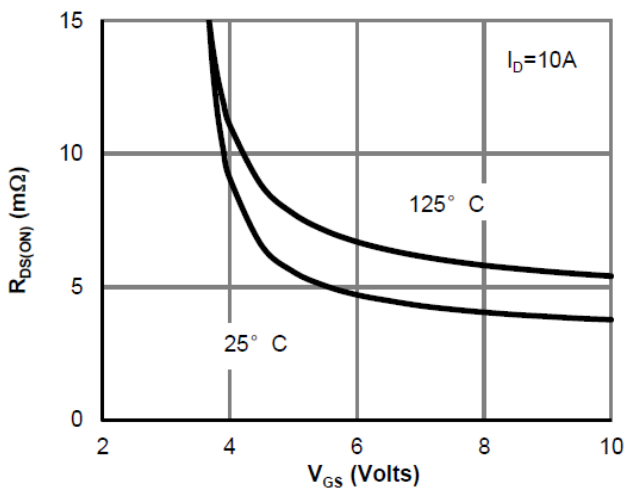


Figure 5. $R_{DS(on)}$ vs. Gate Voltage

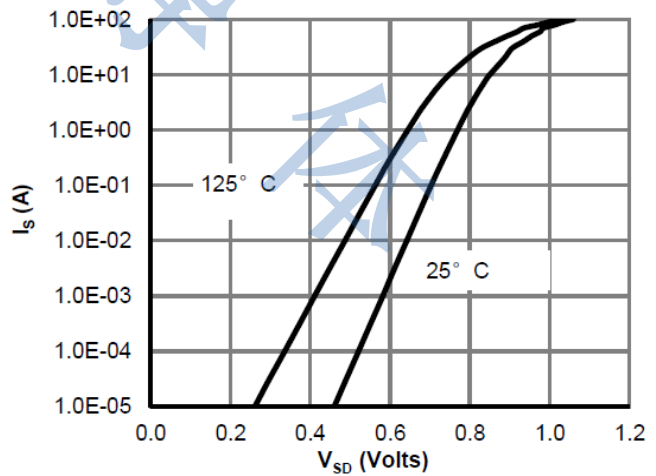


Figure 6. Body-Diode Characteristics

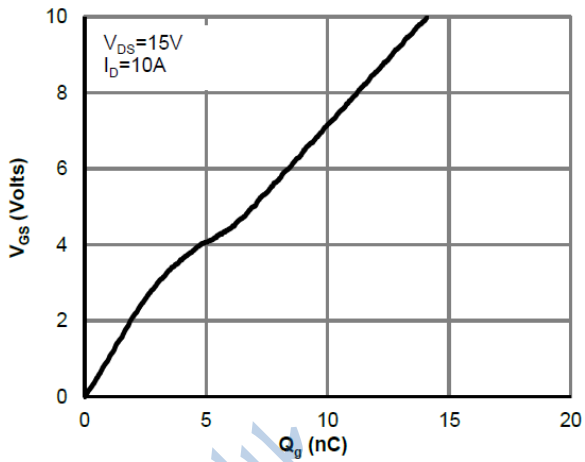


Figure 7. Gate-Charge Characteristics

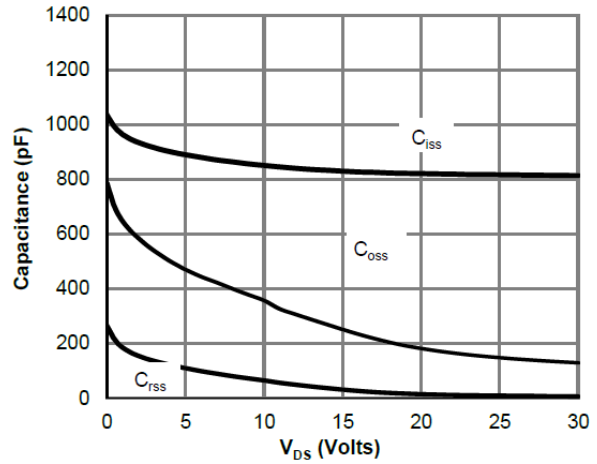


Figure 8. Capacitance Characteristics

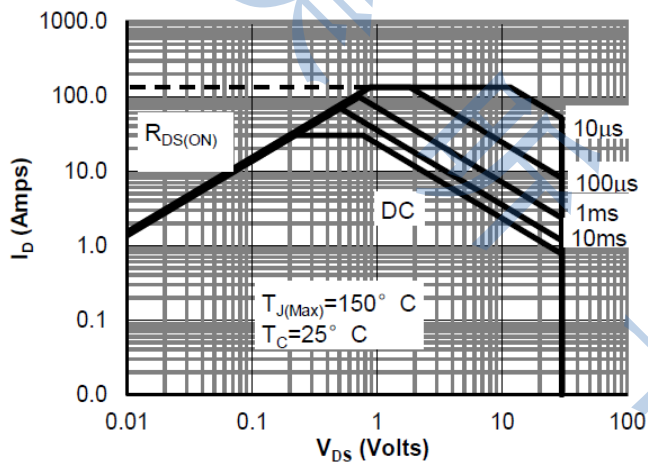
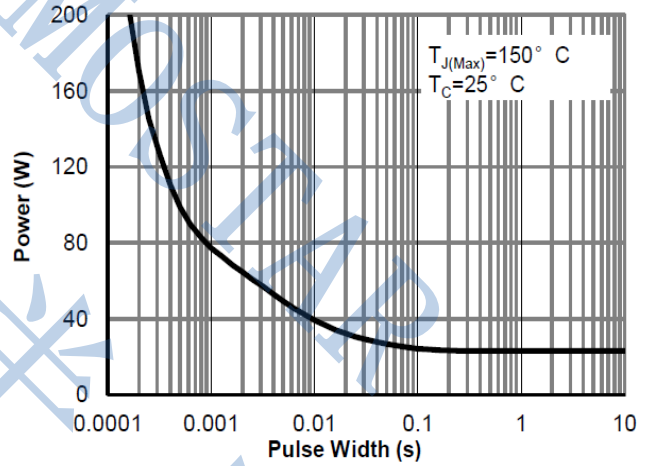
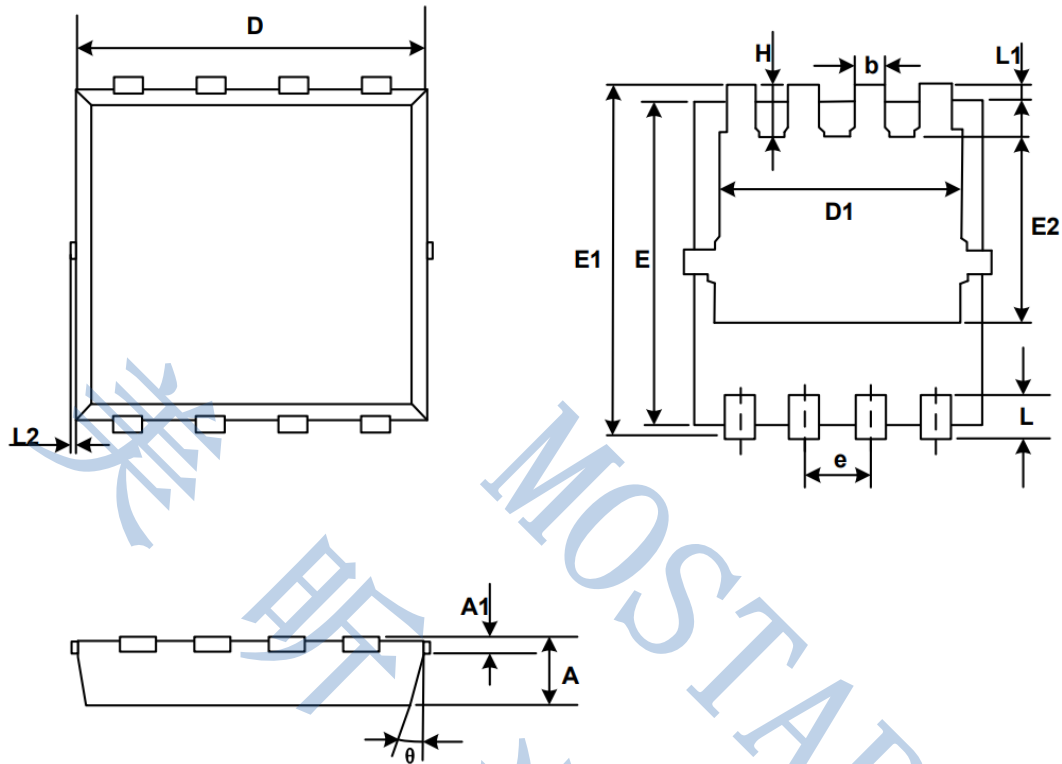


Figure 9. Safe Operating Area



**Figure 10. Single Pulse Power Rating
Junction-to-Ambient**

PDFN3030 PACKAGE INFORMATION


Symbol	Dimensions In Millimeters(mm)	
	MIN	MAX
A	0.65	0.90
A1	0.10	0.25
D	2.90	3.25
D1	2.25	2.69
E	2.90	3.20
E1	3.00	3.60
E2	1.35	2.20
b	0.20	0.40
e	0.65BSC	
L	0.15	0.50
L1	0.13BSC	
L2	0.00	0.20
H	0.15	0.65
θ	0°	14°